

SKID STEERS

▪ 2026 ▪



mustangmfg.com

strong, durable and COMPACT



- The low-profile design and minimal width of 48.4 inches makes working in small spaces easy.

- Low overhead height of 70.3 inches with standard tires, allows entrance into buildings with low clearance.
- Powered by a 35-hp Yanmar diesel engine the 2026 packs a load capacity of 1050 lbs. for great performance in a small package.




- A wide variety of attachments are powered by strong, auxiliary hydraulics with standard flat-faced couplers.

- Unique restraint bar system, tied into the Hydraloc® safety system, provides added safety and is adjustable for operator comfort.

SPECIFICATIONS

	2026	
DIMENSIONS	A. Overall Operating Height - Fully Raised (mm)	139.6" (3546)
	B. Height to Hinge Pin - Fully Raised (mm)	108.1" (2746)
	C. Overall Height to Top of ROPS (mm)	70.3" (1786)
	D. Ground Clearance to Chassis (mm)	6.0" (152)
	E. Overall Length with Bucket (mm)	114" (2896)
	F. Overall Length without Bucket (mm)	88.9" (2258)
	G. Wheelbase (mm)	34.5" (876)
	H. Dump Reach at Full Height (mm)	22.8" (579)
	I. Bucket Rollback at Ground	29°
	J. Dump Angle	42°
	K. Overall Width (mm)	48.4" (1229)
	L. Bucket Width (mm)	55" (1397)
	M. Clearance Circle - Rear (mm)	54.1" (1374)
	N. Clearance Circle - Front without Bucket (mm)	44.1" (1120)
	O. Clearance Circle - Front with Bucket (mm)	69.4" (1763)
	P. Seat to Ground Height (mm)	32.6" (828)
	Q. Rollback at Full Height	99°
	R. Dump Height (mm)	84.5" (2146)
	S. Departure Angle	26°
Standard Specification Tire Size	27x8.5x15 HD	
ENGINE	Make	Yanmar
	Model	3TNV88-Tier III
	Power (kW) @ rpm	35 hp (26) @ 2600
	Displacement (L)	100 cu.in. (1.64)
	Maximum Torque (Nm) @ rpm	80 ft.-lbs (108) @ 1680
HYDRAULIC SYSTEM	Auxiliary Hydraulics - Standard (L/min)	14.5 gpm (55)
	Filtration	4 micron
	System Relief Pressure (bar)	2750 psi (190)
	Reservoir Capacity (L)	8 gal. (30.3)
CAPACITIES / WEIGHT	Rated Operating Capacity ^A (kg)	1050 lbs. (476)
	With Optional Counterweight ^A (kg)	1175 lbs. (533)
	Tipping Load (kg)	2100 lbs. (952)
	Fuel Tank (L)	10.3 gal. (38.9)
	Travel Speed - Maximum (km/hr)	5.9 mph (9.5)
	Operating Weight ^B - Approximate (kg)	4000 lbs. (1814)

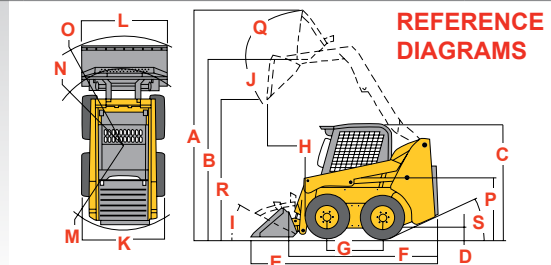

West Bend, WI USA
Tel: 262-334-9461
Fax: 262-338-7517

For more information on Mustang equipment, call our literature hotline at **800-628-0491** or visit our website: **mustangmfg.com**

A Per SAE J818, SAE J732, and ISO 14397
B Unit weight with standard bucket, 175 lbs. (79 kg) operator and full fuel tank